



Wars LED




- › Stopień ochrony IP65 / IP65 protection rating
- › Korpus i klosz wykonany z poliwęglanu (PC) / Body and lampshade made of PC
- › Zasilanie 230 V 50 Hz lub 220 V DC / Power supply: 230 V 50 Hz or 220 V DC
- › Okablowanie przystosowane do świetlówek LED / Wiring adapted for LED tubes
- › Montaż sufitowy lub na zwieszakach – regulowany / Ceiling installation or pendant type installation – adjustable
- › Świetłówki LED zamawiane oddzielnie / LED tubes separately available
- › Do oświetlenia dróg i wyjść ewakuacyjnych w budynkach użyteczności publicznej / For illuminating evacuation directions and designating evacuation exits in public utility buildings

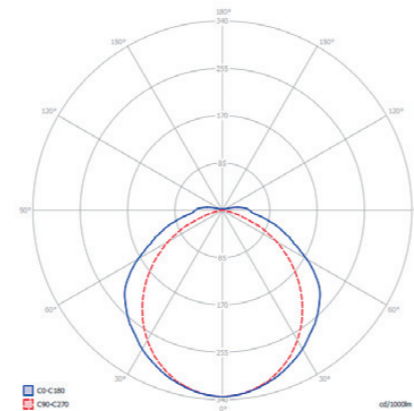




Wars 2x60 LED

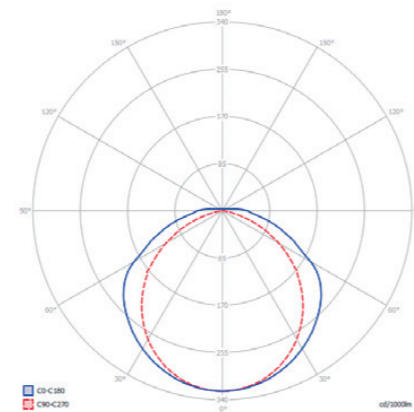

Wars 2x120 LED

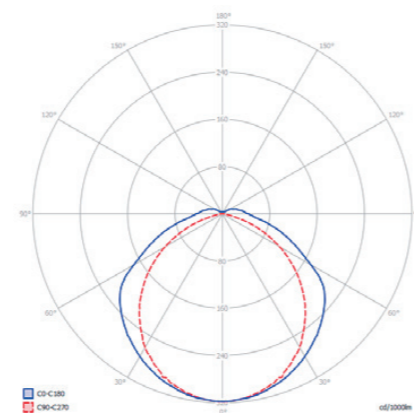

Wars 2x150 LED

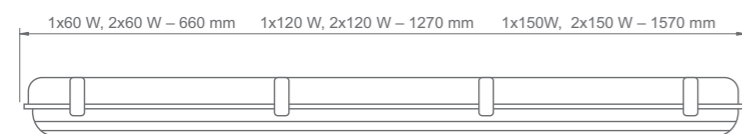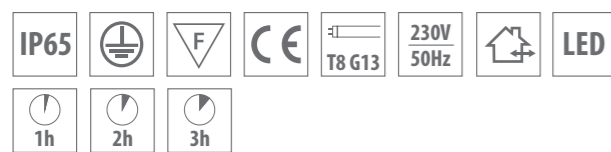

MODELE AWARYJNE / EMERGENCY MODELS

Model / Model	Numer katalogowy / Catalogue number	Wymiary (mm) / Dimensions (mm)	Waga (kg) / Weight (kg)
WARS 1x60 LED SA/A 5000 K	99669	660x92x88	2,10
WARS 2x60 LED SA/A 5000 K *	99668	660x92x134	2,30
WARS 1x120 LED SA/A 5000 K	99667	1270x92x88	3,40
WARS 2x120 LED SA/A 5000 K *	99666	1270x92x134	3,90
WARS 1x150 LED SA/A 5000 K	99665	1570x92x88	4,40
WARS 2x150 LED SA/A 5000 K *	99664	1570x92x134	5,60

* Wykonania o temperaturze 4000 K na zamówienie specjalne / Versions with the 4000 K temperature are available on special request

MODELE STANDARDOWE / STANDARD MODELS

Model / Model	Numer katalogowy / Catalogue number	Wymiary (mm) / Dimensions (mm)	Waga (kg) / Weight (kg)
WARS 1x60 LED	99669	660x92x88	2,10
WARS 2x60 LED	99668	660x92x134	2,30
WARS 1x120 LED	99667	1270x92x88	3,40
WARS 2x120 LED	99666	1270x92x134	3,90
WARS 1x150 LED	99665	1570x92x88	4,40
WARS 2x150 LED	99664	1570x92x134	5,60